



许继电气股份有限公司
XJ ELECTRIC CORPORATION

iEVC8200e

360kW Group Management DC Charger



Address:

Website:

TEL:

E-mail:

APPLICATION SCENARIOS

TECHNICAL FEATURES

REFERENCES

[illegible]



许继电气股份有限公司
XJ ELECTRIC CORPORATION

EVQC33

Electric Vehicle DC Charger

240kW EV Charging Station

Electric Vehicle DC Charger



Address:

Website:

E-mail:



Secure

Data Encryption to Protect Customer Privacy

Easy

Easy Operation and Maintenance

Convenient

Multi-vehicle Compatibility

Charging Power

360kW

Charging Inlets

Dual connector

APPLICATION SCENARIOS

Residential and commercial destinations, shopping malls, exhibition centers, gas stations, parking lots, terminals, airports, ports, scenic spots, and more.

Operating Temperature: -30°C ~ +55°C (optional model supports operation over 60°C)

Dimensions (Width * Depth * Height): 1900mm*1000mm*2070mm

TECHNICAL FEATURES

- Input over/under-voltage protection, output short circuit/over-current protection
- Intelligent temperature control, leakage protection, output anti-reverse connection
- Anti-active short-circuit reset, active isolation detection

SYSTEM RUN OCCURRENCE

Power management and protection

Strong weather resistance, high temperature and humidity, and other harsh conditions

Communication protocol

Supports APP control, RFID cards, and PIN/PW authentication


Easy to use interface, bilingual with Chinese and English



许继电气股份有限公司
XJ ELECTRIC CORPORATION

iZCI33

7kW AC Charger

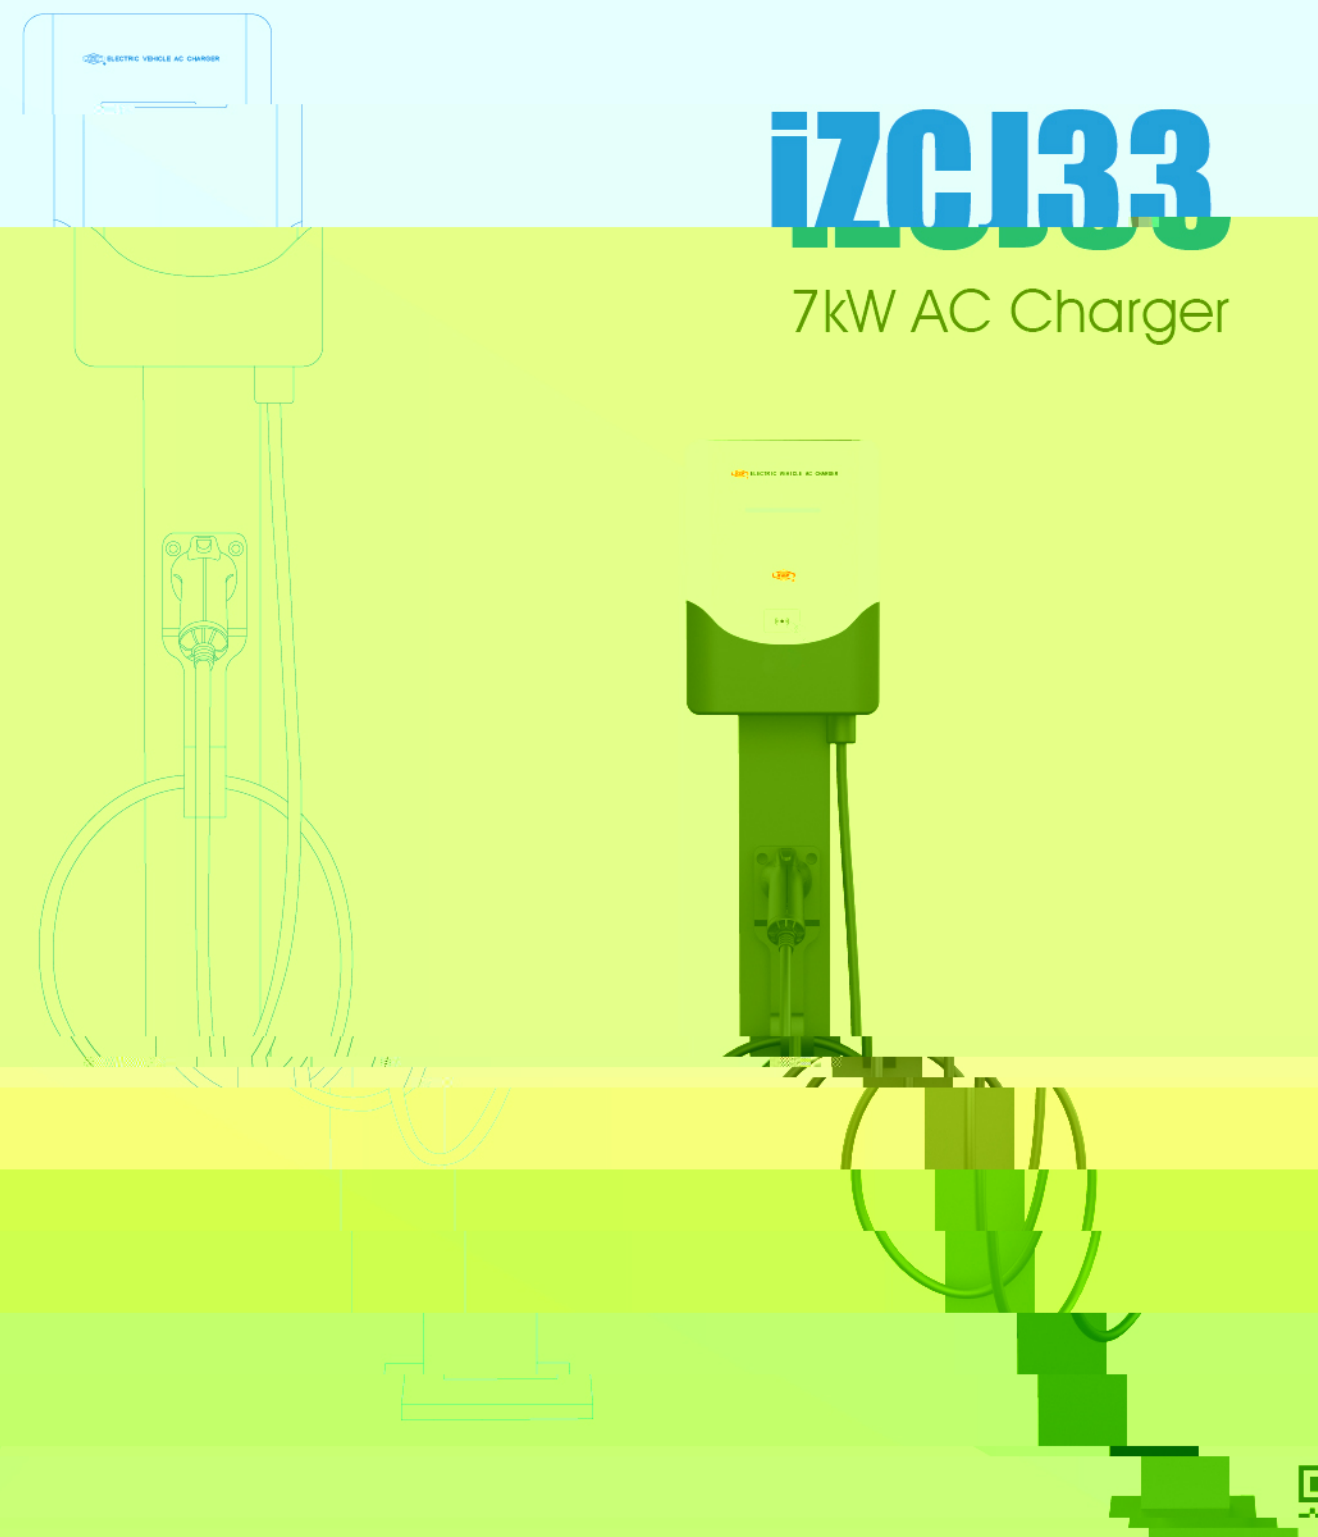


许继电气股份有限公司
XJ ELECTRIC CORPORATION

Address: No.1298, XJ Avenue, Xuchang City, Henan Province, China

Website: <http://www.xj-electric.com> **E-mail:** hw@xj-electric.com



Website: www.xj-electric.com Brochures

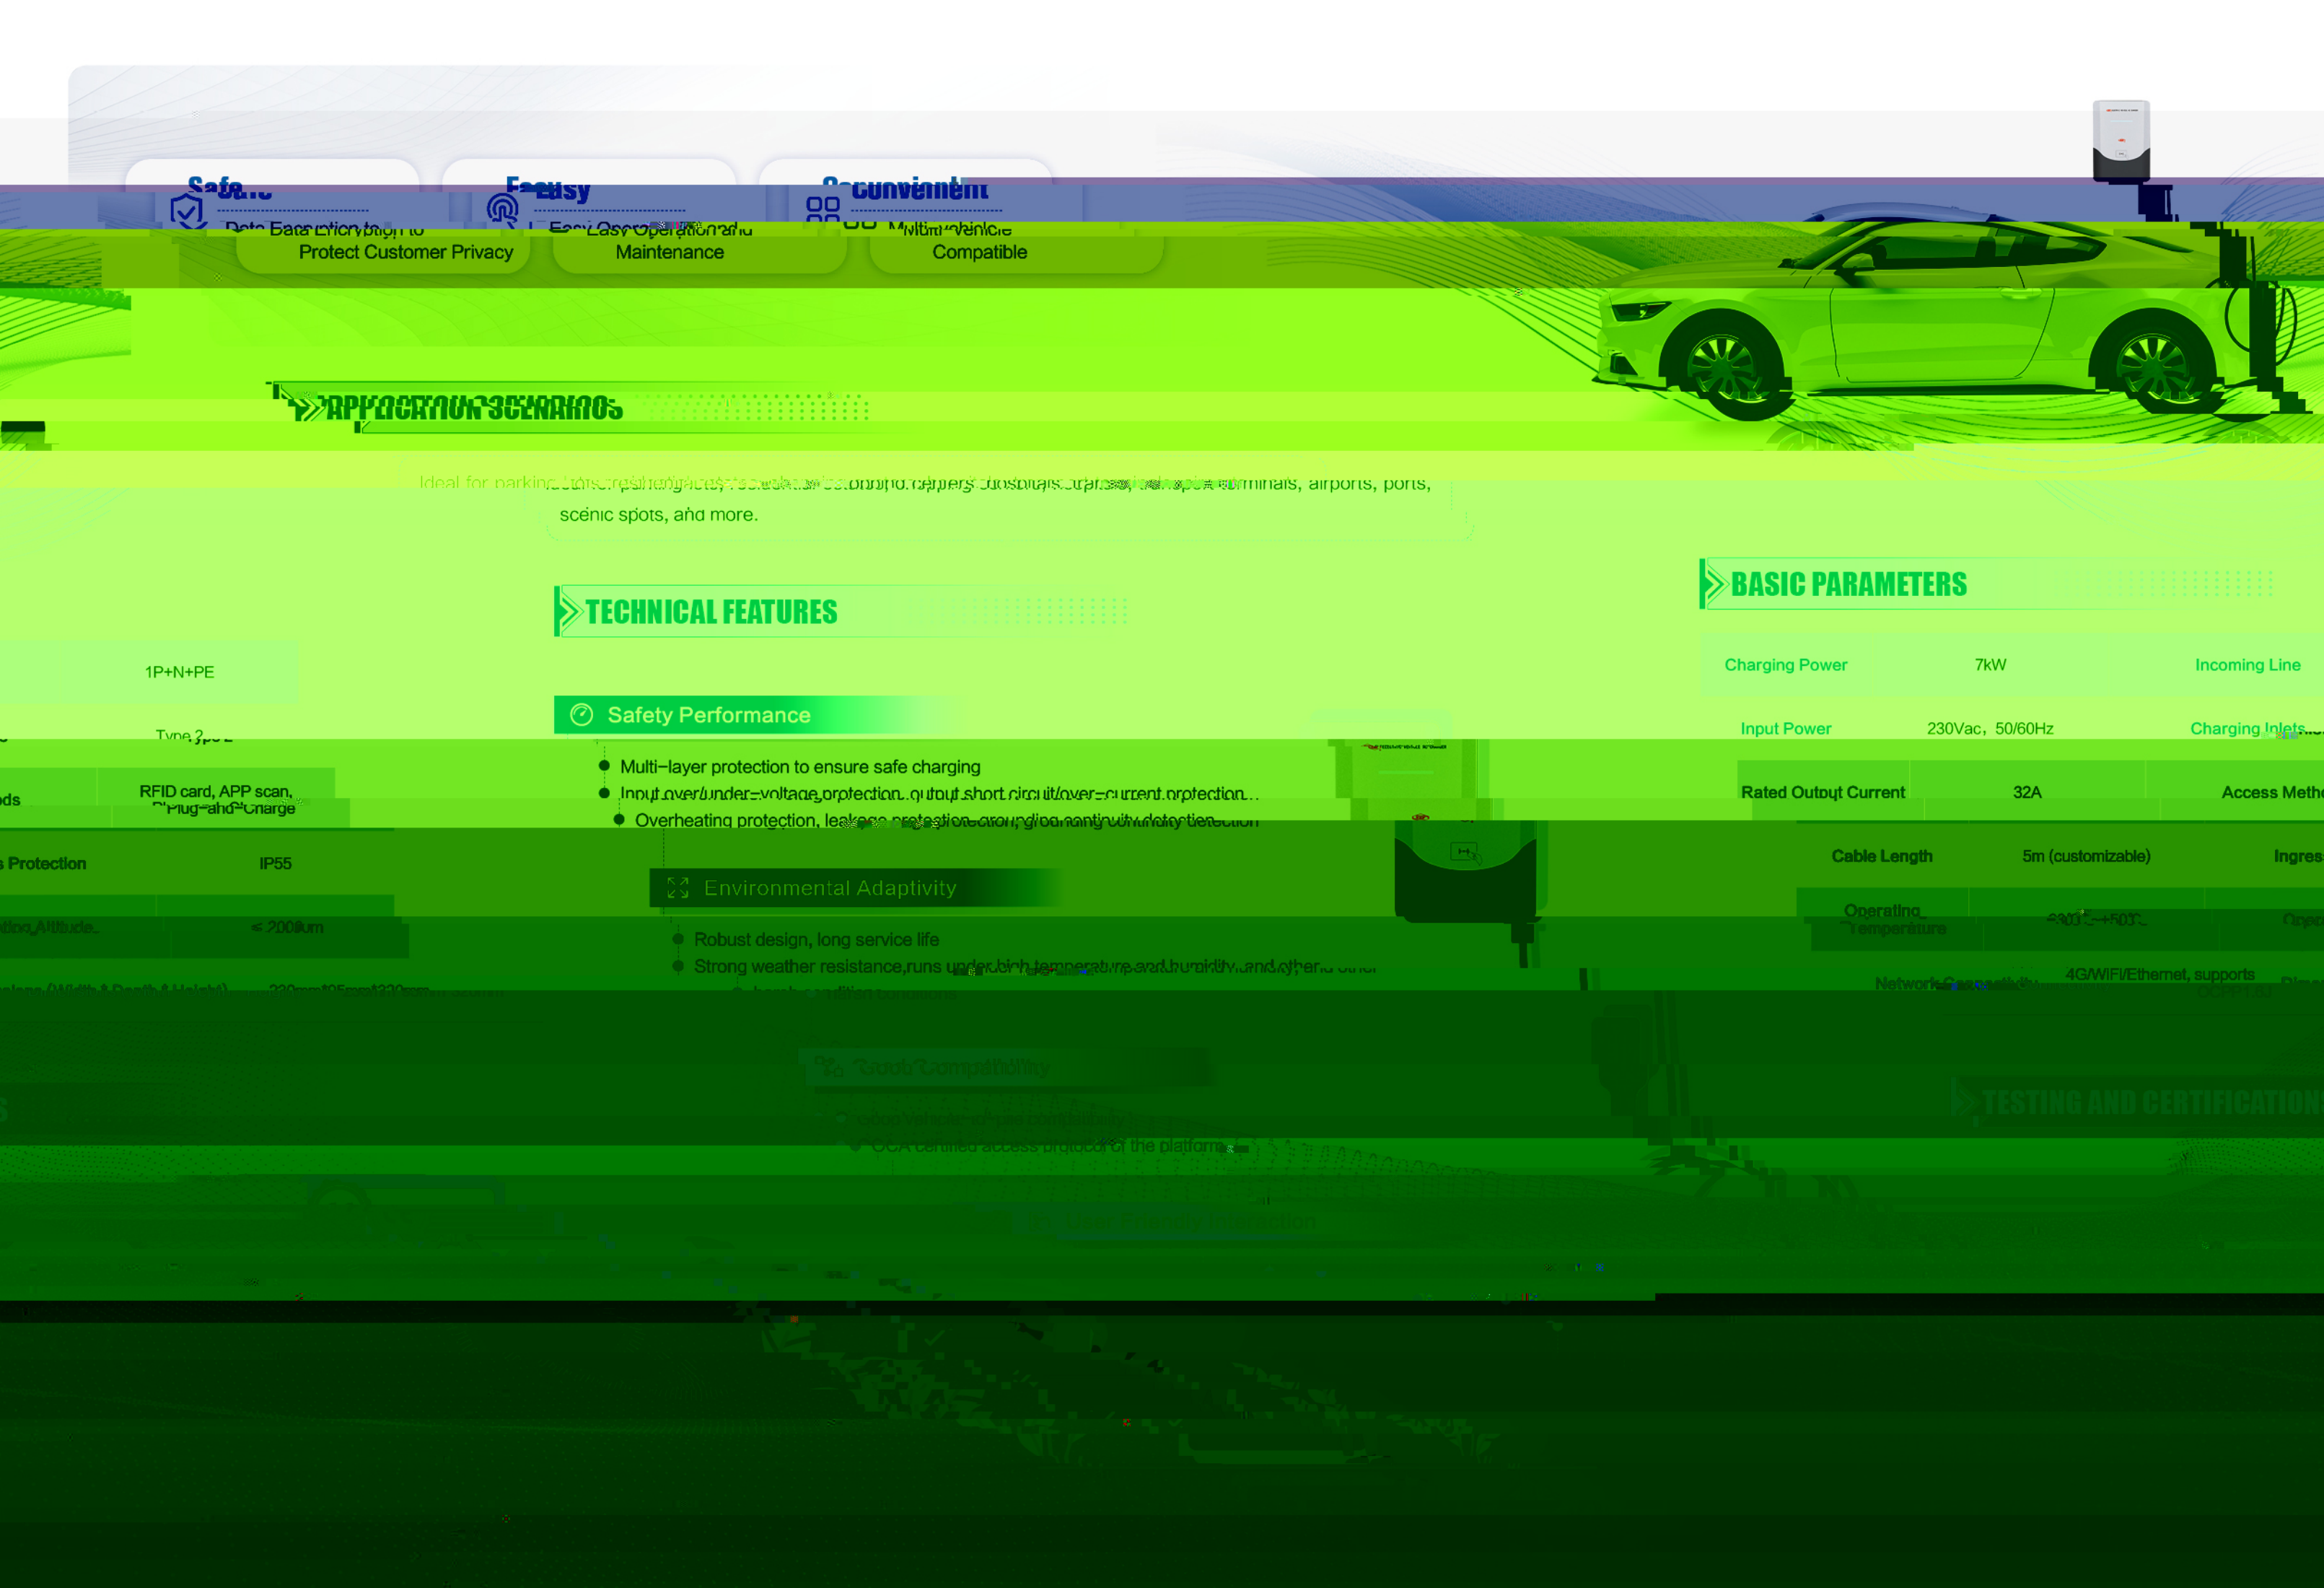

Safety

Data Encryption to
Protect Customer Privacy



Easy

Easy Operation and
Maintenance



Convenient

Multi-Vehicle
Compatible

APPLICATION SCENARIOS

Ideal for parking lots, shopping malls, residential areas, commercial centers, hospitals, corporate campuses, and open-air venues, scenic spots, and more.

TECHNICAL FEATURES



Safety Performance

- Multi-layer protection to ensure safe charging
- Input over/under-voltage protection, output short circuit/over-current protection...
- Overheating protection, leakage protection, grounding fault with detection...



Environmental Adaptivity

- Robust design, long service life
- Strong weather resistance, runs under high temperature and humidity, and other harsh conditions

Good Compatibility

- Good Vehicle-to-grid compatibility
- OCA defined access protocol of the platform

User Friendly Interaction

BASIC PARAMETERS

Charging Power7kWIncoming Line

Input Power230Vac, 50/60HzCharging Inlets

Rated Output Current32AAccess Methods

Cable Length5m (customizable)Ingress Protection

Operating Temperature-30℃~+50℃Operating Altitude

Network Communication4G/WiFi/Ethernet, supports RS485, CAN, etc.

TESTING AND CERTIFICATION




许继电气股份有限公司

XJ ELECTRIC CORPORATION

TEVQC31

400/90kW EV Charging Station

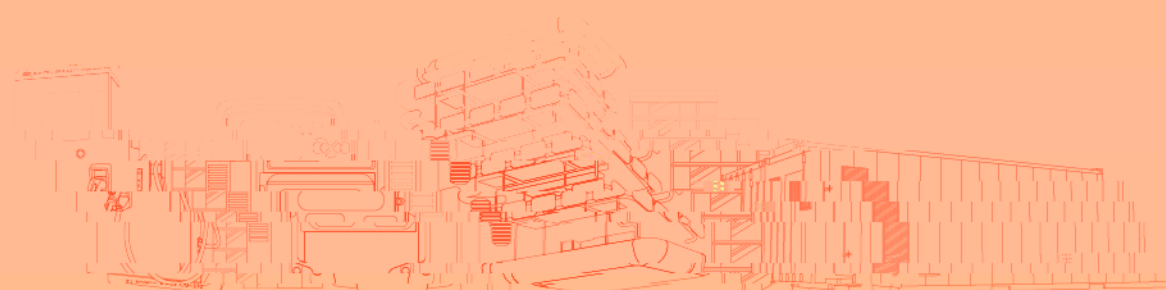

许继电气股份有限公司

XJ ELECTRIC CORPORATION

Address: No.1298, XJ Avenue, Xuchang City, Henan Province, China

Website: <https://xjec.com/en/>

E-mail: hwyxchb@163.com



Website

Brochures





Safe

Data Encryption to
Protect Customer Privacy




Easy

Easy Operation and
Maintenance




Convenient

Multi-vehicle
Compatible

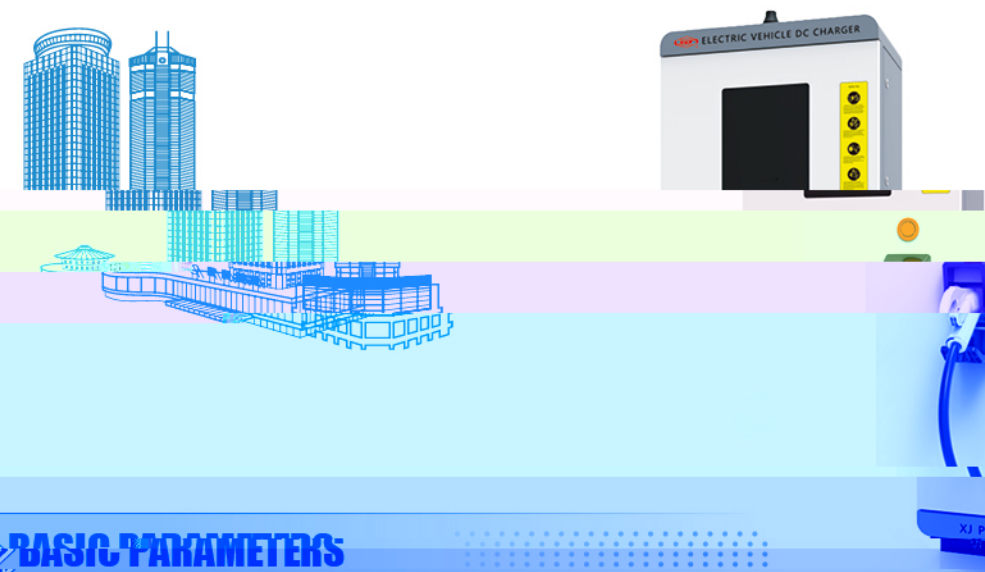

APPLICATION SCENARIOS

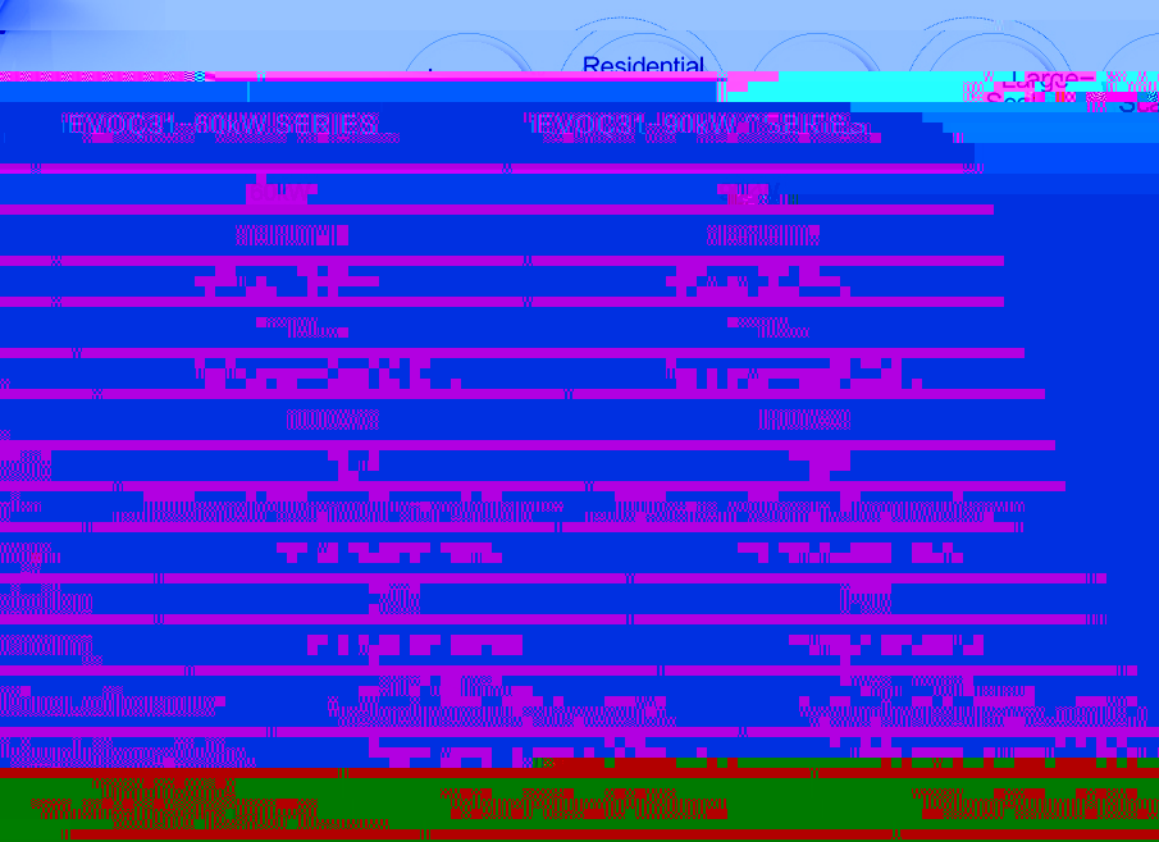

BASIC PARAMETERS



TESTING AND CERTIFICATIONS



Good compatibility





许继电气股份有限公司
XUJIE ELECTRIC CORPORATION

iZCJ

0/1/1/22kW AC Charger



许继电气股份有限公司

Address: 100000, Zhengzhou, Henan, China

Website: www.xj-electric.com

E-mail: sales@xj-electric.com



Safe

Data Encryption to

Easy Operation and

22


¹⁴ *ivm* *hiv* *ve* *hiv* *ve*

BASIC PARAMETERS

	IZCJ-07 SERIES	IZCJ-11 SERIES	IZCJ-22 SERIES
Charging Power	714W	441W	220W
Input Line	1P+N+PE	1P+N+PE	3P+N+PE
Input Power	230Vac, 50/60Hz	230Vac, 50/60Hz	400Vac, 50/60Hz
Charging Inlets	Two 3-pin	Two 3-pin	Two 3-pin
Rated Output Current	32A	32A	16A
Media Options	RFID card, APP scan, PUK, REID card, APP	RFID card, APP scan, PUK, REID card, APP	RFID card, APP scan, PUK, REID card, APP
Charging Length	5m (customizable)	5m (customizable)	5m (customizable)
Ingress Protection	IP55	IP55	IP55
Operating Temperature	-30℃~+50℃	-30℃~+50℃	-30℃~+50℃
Operating Altitude	≤2000m	≤2000m	≤2000m
Network Connectivity	4G/WiFi/Ethernet, sOCPP1.6J	4G/WiFi/Ethernet, sOCPP1.6J	4G/WiFi/Ethernet, sOCPP1.6J
Dimensions (Width * Depth * Height)	220mm*140mm*140mm	220mm*140mm*140mm	220mm*140mm*140mm



许继电气股份有限公司
XJ ELECTRIC CORPORATION

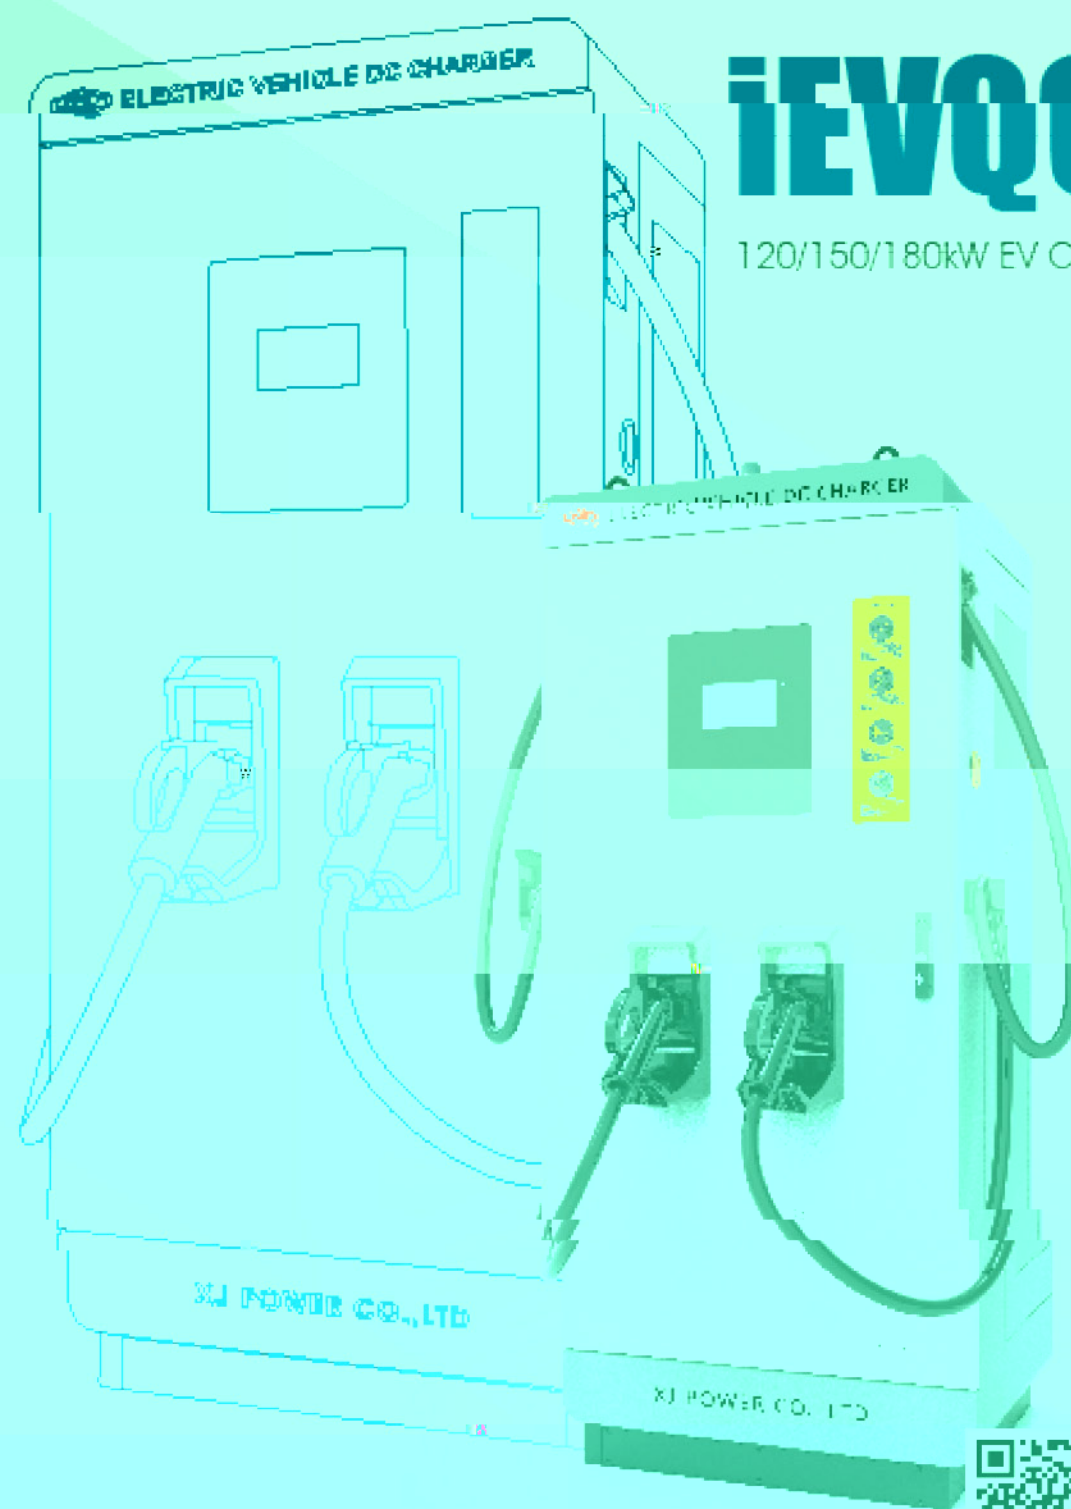

iEVQC33

120/150/180kW EV Charging Station



许继电气股份有限公司
XJ ELECTRIC CORPORATION

Address: No.1298, XJ Avenue, Xuchang City, Henan Province, China

Website: <https://xjec.com/en/>

E-mail: hwyxchb@163.com



Website



Brochures



Safe...

Large-scale car parks, residential and commercial estates, shopping centers, hospitals, transport terminals, airports, ports, scenic spots, and more.



Easy...

Multi-vehicle charging stations



Multi-vehicle...

Multi-vehicle charging stations

APPLICATION SCENARIOS

Large-scale car parks, residential and commercial estates, shopping centers, hospitals, transport terminals, airports, ports, scenic spots, and more.

TECHNICAL FEATURES

Multi-layer Safety Protection

- Input over/under-voltage protection, output short circuit/over-current protection
- Anti-reverse connection
- Active software and hardware isolation detection

Good compatibility

- Compatible with GB/T 20157, ISO 15118 communication protocols
- OCA certified access protocol of the platform

Environmental adaptivity

- Robust design, long service life
- Strong weather resistance, runs under high temperature and humidity, and other harsh conditions

User friendly interaction



- LCD display screen and LED status indicator
- Supports APP control, RFID card, and PnC (Plug and Charge)
- Easy to use interface, bilingual with Chinese and English



BASIC PARAMETERS

	IEVQC33-120kW SERIES	IEVQC33-150kW SERIES	IEVQC33-180kW SERIES
Charging power	120kW	150kW	180kW
Charging inlets	Dual connector (2*CCS2)	Dual connector (2*CCS2)	Dual connector (2*CCS2)
Rated voltage	1000	1000	1000
Incoming line	3P+N+PE	3P+N+PE	3P+N+PE
Input power	400Vac, 50/60Hz	400Vac, 50/60Hz	400Vac, 50/60Hz
Input current	217A	271A	325A
Maximum current	200A/250A/300A/350A/400A/450A/500A/550A/600A/650A/700A/750A/800A/850A/900A/950A/1000A	200A/250A/300A/350A/400A/450A/500A/550A/600A/650A/700A/750A/800A/850A/900A/950A/1000A	200A/250A/300A/350A/400A/450A/500A/550A/600A/650A/700A/750A/800A/850A/900A/950A/1000A
Access methods	RFID card, APP, PnC, Plug-and-Charge	RFID card, APP, PnC, Plug-and-Charge	RFID card, APP, PnC, Plug-and-Charge
Cable length	5m/8m (customizable)	5m/8m (customizable)	5m/8m (customizable)
Ingress protection	IP55	IP55	IP55
Operating temperature	-30°C ~ +55°C (reduced power when over 50°C)	-30°C ~ +55°C (reduced power when over 50°C)	-30°C ~ +55°C (reduced power when over 50°C)
Network connectivity	3G/4G/Ethernet, supports OCPP1.6J	3G/4G/Ethernet, supports OCPP1.6J	3G/4G/Ethernet, supports OCPP1.6J
Dimensions (width * depth * height)	850mm*700mm*1930mm	850mm*700mm*1930mm	850mm*700mm*1930mm

TESTING AND CERTIFICATIONS







许继电气股份有限公司
XJ ELECTRIC CORPORATION

IEVQC33

60/90kW EV Charging Station

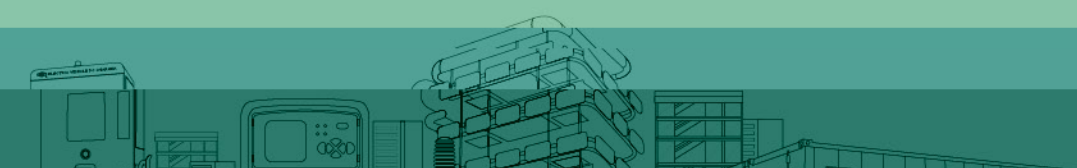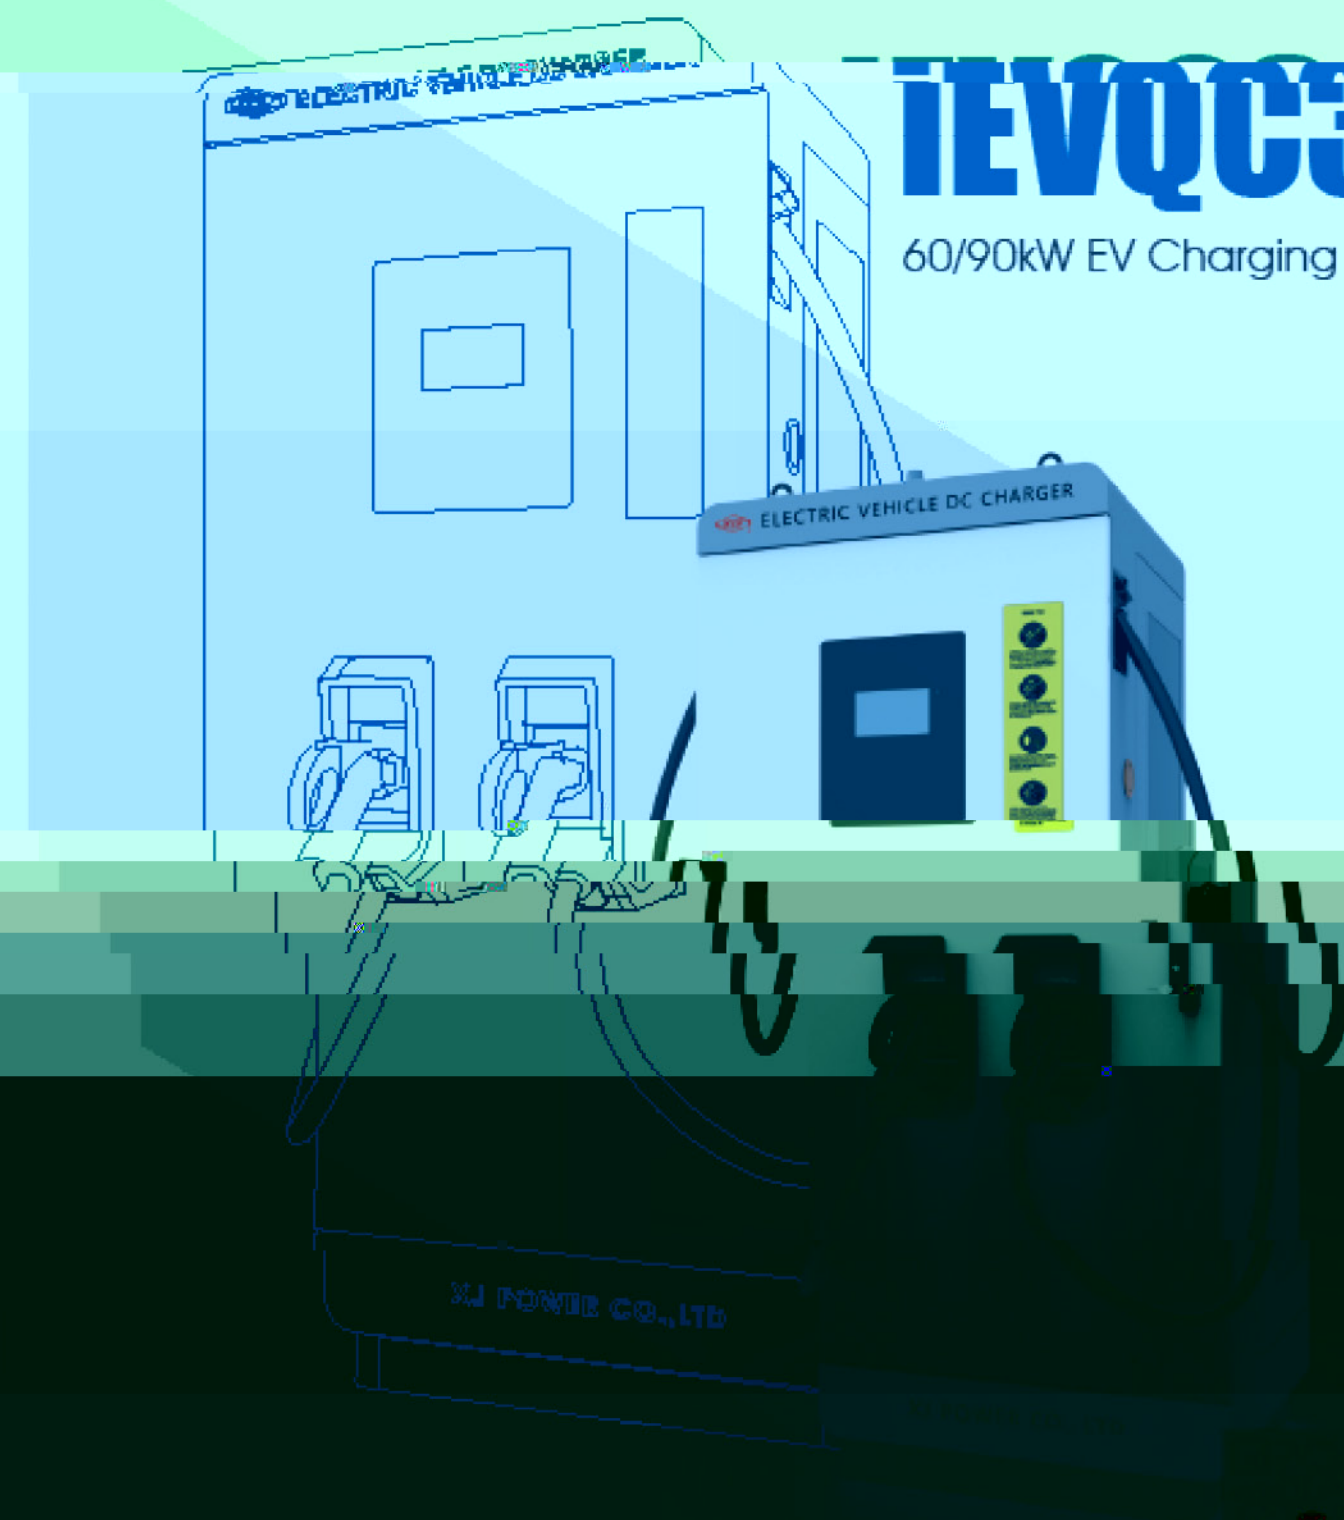

Address:

Website: www.xj-electric.com

E-mail: sales@xj-electric.com

Safe
Protect Customer Privacy

Easy
maintenance

Convenient
Multi-vehicle
Compatible

APPLICATION SCENARIOS

Large-scale car parks, residential and commercial estates, shopping centers, hospitals, transport terminals, airports, ports, scenic spots, and more.

TECHNICAL FEATURES

Multi-layer Safety Protection

- Input over/under-voltage protection, output short circuit/over-current protection
- Intelligent temperature control, leakage protection, output anti-reverse connection
- Active soft/hard reset, active isolation detection

Environmental adaptivity,

- Robust design, long service life
- Strong weather resistance, runs under high temperature and humidity, and other harsh conditions




Good compatibility

- Compatible with DIN70121, ISO15118 communication protocols.
- OCA certified access protocol of the platform

User friendly interaction

- LCD display screen and LED status indicator
- Supports APP control, RFID card, and PnC (Plug and Charge),
- Easy to use interface, bilingual with Chinese and English

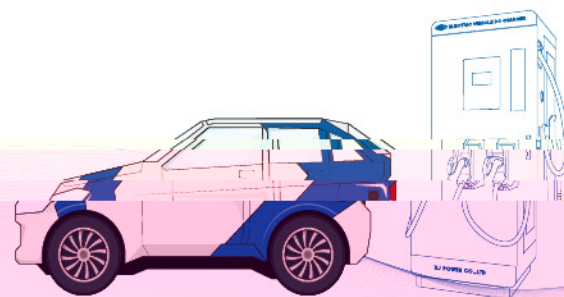

BASIC PARAMETERS

	IEVQC33-60kW SERIES	IEVQC33-90kW SERIES
Charging power	60kW	150kW
Charging inlets	Dual connector (2*CCS2)	Dual connector (2*CCS2)
Rated voltage	1000	1000
Incoming line	3P+N+PE	3P+N+PE
Input power	400Vac, 50/60Hz	400Vac, 50/60Hz
Input current	108A	163A
Maximum current	200A	200A
Access methods	RFID card, APP scan, Plug-and-Charge	RFID card, APP scan, Plug-and-Charge
Cable length	5m/8m (customizable)	5m/8m (customizable)
Ingress protection	IP55	IP55
Internal cooling	Intelligent air-cooled	Intelligent air-cooled
Operating temperature	-30℃ ~+55℃ (reduced power when over 50℃)	-30℃ ~+55℃ (reduced power when over 50℃)
Network connectivity	3G/4G/Ethernet, supports OCPP1.6J	3G/4G/Ethernet, supports OCPP1.6J
Dimensions (without cable height)	950mm*710mm*190mm	950mm*710mm*190mm

TESTING AND CERTIFICATIONS

